Signature Rider and Passenger Seats

Part Number: KXA00306, KXA00307, KXA00344 & KXA00345

Models: Classic 650



WARNING: Royal Enfield genuine accessories are designed to fit only the specific Royal Enfield motorcycle(s) that are specified above. They should not be fitted to any other type of motorcycle. Pay particular attention to the warnings and cautions contained in this instruction, failure to do so may result in an incorrect installation of the accessory which could result in an unsafe riding condition and possible accident. If in any doubt always seek help from your authorised Royal Enfield dealer.



WARNING: Before starting any accessory kit installation ensure the motorcycle is supported in a stable condition. Failure to support the motorcycle correctly could lead to motorcycle damage or personal injury.




WARNING: All fixings must be tightened to the torque values specified in this instruction. Failure to tighten fixings to the correct torque could result in an unsafe riding condition and possible accident



CAUTION: Care should be taken when fitting any accessory kit. Incorrect handling of kit components or the use of incorrect tools could lead to component or motorcycle damage.


NOTE: The content of this instruction is subject to change at any time without notice or liability. Royal Enfield reserves the right to revise the information presented at any time.

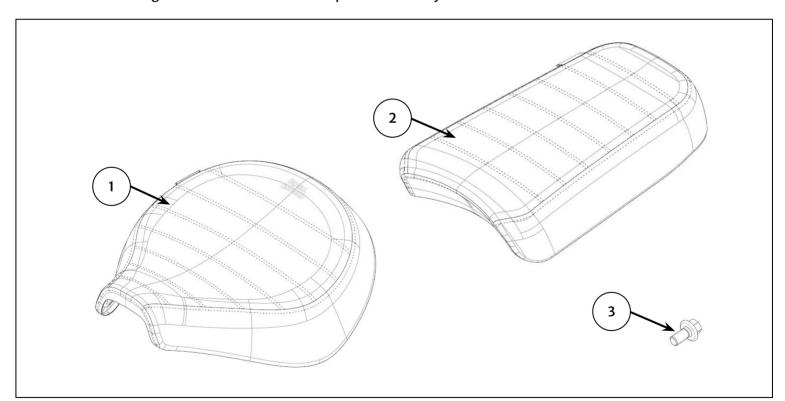


Item	Description	Qty
1	Signature Rider Seat	1
2	Signature Passenger Seat	1
3	Fixing, M6 x 12mm	1

1 Remove the pillion seat (1) as described in the Owner's Manual.

Retain the original seat for reuse if the motorcycle is to be returned to its original condition.

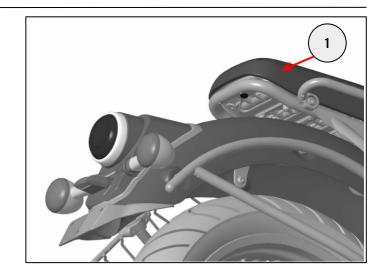

2 Remove the rider seat (1) as described in the Owner's Manual.

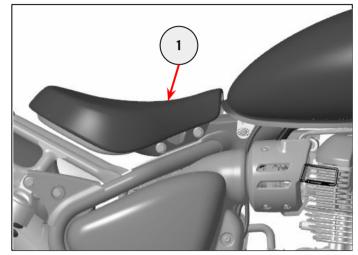


3 Remove the seat bracket (1) and base cover (2) from the original seat by removing the fixings (3).


Retain the seat bracket (1), base cover (2) and fixings (3) for reuse. Retain the original seat for reuse if the motorcycle is to be returned to its original condition.



5mm hexagonal bit and ratchet

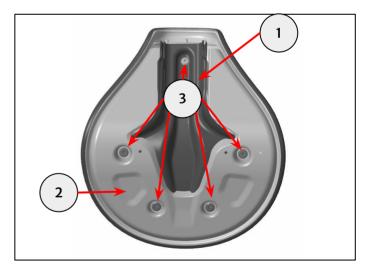

4 Remove the 5 clip nuts (1) from the rider seat base (2), and refit these to the same locations on the touring rider seat base.

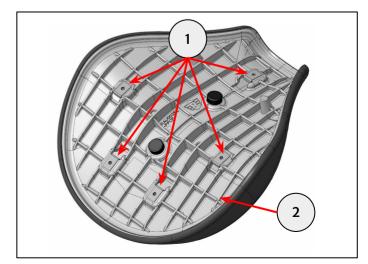


5 Fix the seat bracket (1) and base cover (2) to the Signature rider seat (3) using the fixings (4) removed in step 3.

Tighten fixings (4) to 10 Nm.



5mm hexagonal bit and torque wrench

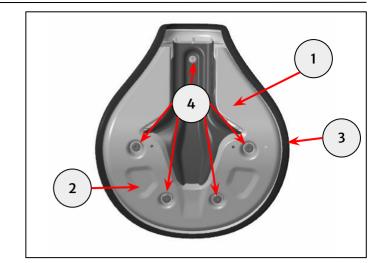


6 Fix the Signature rider seat (1) to the frame (2) using the fixings (3) removed in step 2.


Tighten fixings to 45Nm.





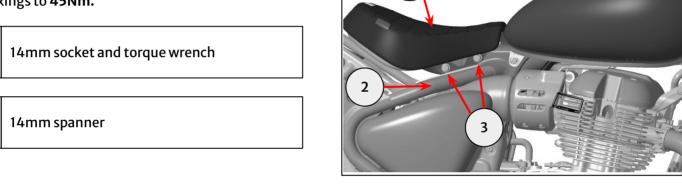

7 Fit the Signature passenger seat (1) to the rear subframe (2) by aligning the seat base front hook (3) with the rear subframe frame (2) and lowering the rear end of the seat (1).



8 Fix the seat (1) to the rear subframe (2) using the fixing (3) from the kit.

Tighten fixing to 8Nm.



8mm socket and torque wrench

