ROYAL ENFIELD
Genuine Motorcycle Accessory Instructions

Touring Dual Seat

Part Number:
KXA00308

Models:
Bullet 650


WARNING: **Royal Enfield genuine accessories are designed to fit only the specific Royal Enfield motorcycle(s) that are specified above. They should not be fitted to any other type of motorcycle. Pay particular attention to the warnings and cautions contained in this instruction, failure to do so may result in an incorrect installation of the accessory which could result in an unsafe riding condition and possible accident. If in any doubt always seek help from your authorised Royal Enfield dealer.**

WARNING: **Before starting any accessory kit installation ensure the motorcycle is supported in a stable condition. Failure to support the motorcycle correctly could lead to motorcycle damage or personal injury.**

WARNING: **All fixings must be tightened to the torque values specified in this instruction. Failure to tighten fixings to the correct torque could result in an unsafe riding condition and possible accident**

CAUTION: Care should be taken when fitting any accessory kit. Incorrect handling of kit components or the use of incorrect tools could lead to component or motorcycle damage.

NOTE: The content of this instruction is subject to change at any time without notice or liability. Royal Enfield reserves the right to revise the information presented at any time.

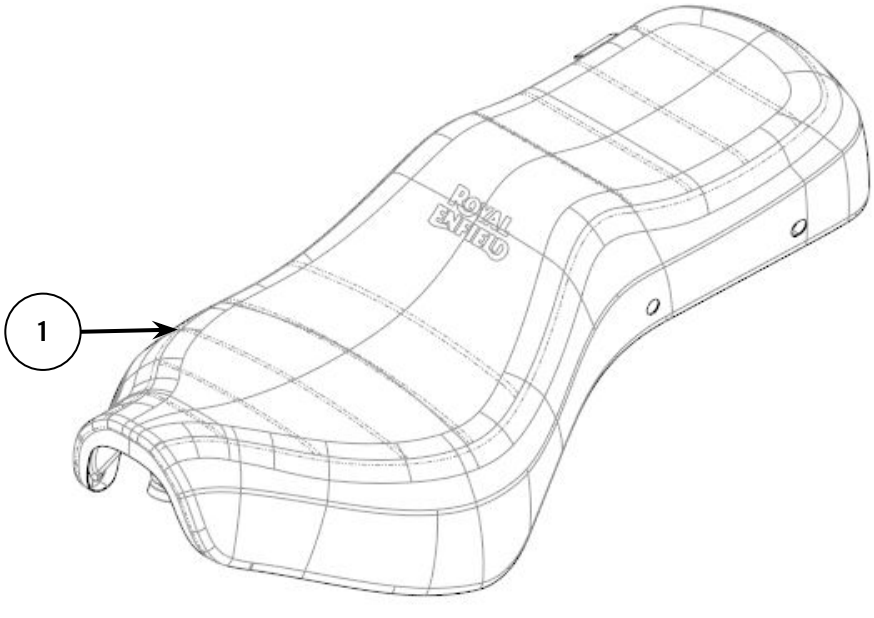

Item	Description	Qty
1	Touring Dual Seat	1


© 2025 Royal Enfield

1 Remove the grab rail (1) by removing the fixings (2).

Retain the grab rail (1) and fixings (2) for reuse.


Repeat step 1 on the right hand side.

	6mm hexagonal bit and ratchet

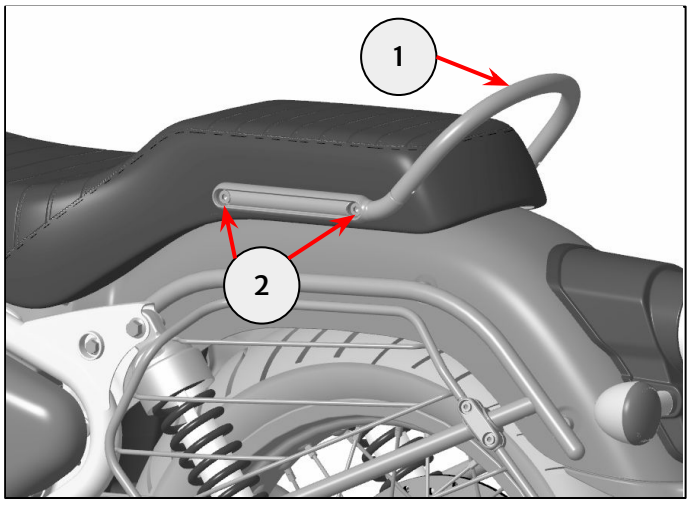


2 Remove the seat assembly (1) by lifting the rear end of the seat upwards and pulling rearwards.

Retain the original seat (1) for reuse if the motorcycle is to be returned to its original condition.

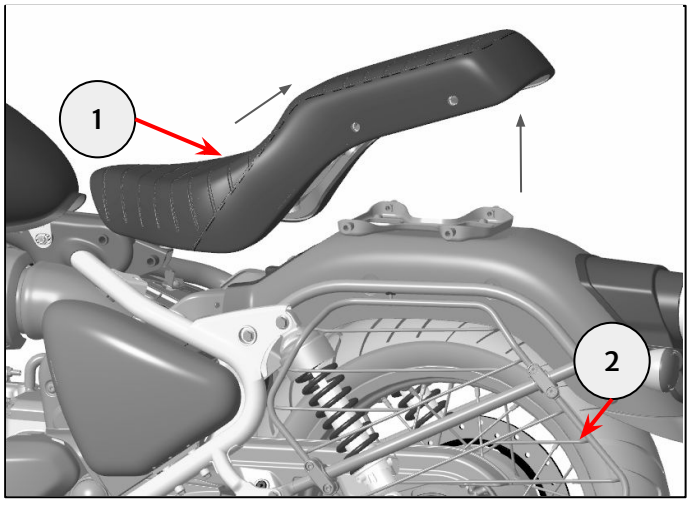

3 Fit the touring seat (1) by aligning the seat hook (2) with the slot in the frame (3), and levering the seat (1) into position.

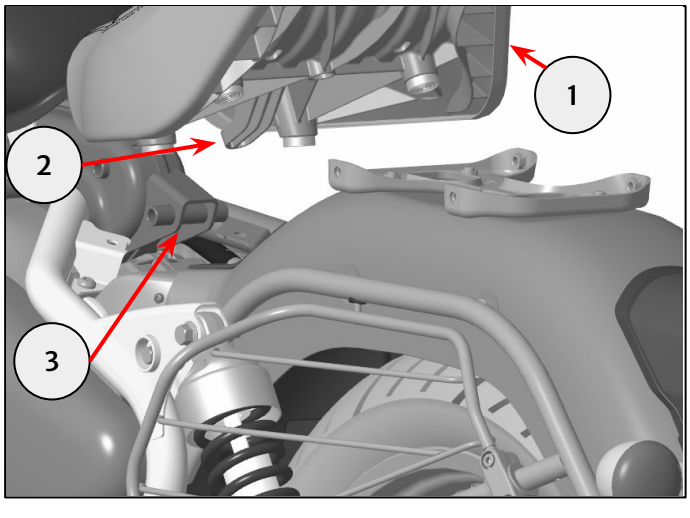


© 2025 Royal Enfield


4 Fix the grab rail (1) to the seat (2) and mounting bracket (3), by inserting the fixings (4) removed in step 1 through the grab handle (1), grab rail sleeve (5), seat (2), rubber support (6) and mounting bracket (3) .

Repeat step 4 on the right hand side.

Tighten fixings (4) to **25 Nm.**

	6mm hexagonal bit and torque wrench

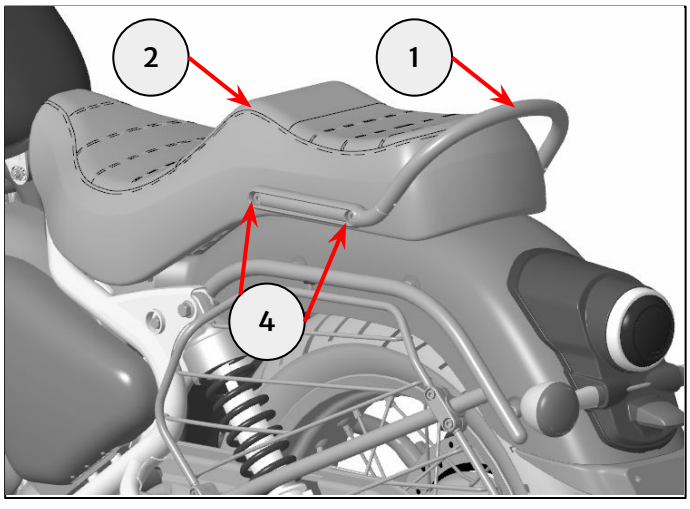

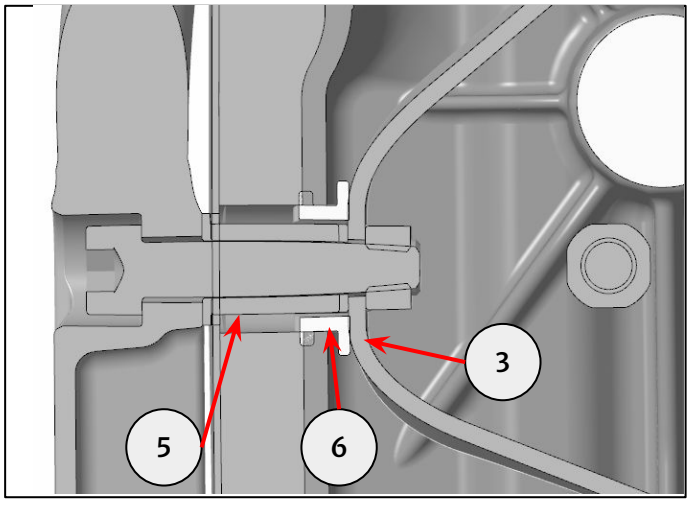

WARNING: After fitting any genuine Royal Enfield accessory always ride the motorcycle with caution and allow time to become familiar with any change in the motorcycle handling characteristics. Failure to become familiar with any change in the motorcycle handling characteristics may cause the motorcycle to become unstable and result in an accident.

© 2025 Royal Enfield